


LCN


1460 Series

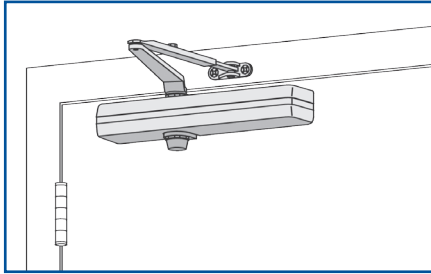

Features

- UL and cUL listed for self-closing doors without hold-open. Tested and certified under ANSI Standard A156.4, grade one.
- Standard 1460 series closer shipped with regular arm, a slim line plastic cover, and self reaming and tapping screws.
- Multiple cover options include; Standard (Slim line), Smooth Slim line (EC), Full and Designer Series.
- Non-sized (1-6) cylinder is adjustable for interior doors to 5'0" and exterior doors to 4'0".
- Closer mounts hinge side, top jamb and parallel arm on either right or left swinging doors.
- Closer meets ADA requirements.
- Standard or optional custom powder coat finish.
- Optional plated finish on Designer Series metal cover, arm and fasteners.
- Optional SRI primer for installations in corrosive conditions.


4010 Series

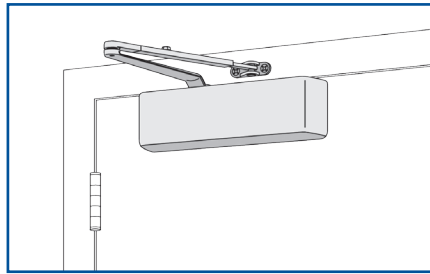

Features

- Standard 4010 series closer is shipped with regular arm, standard plastic cover, and self reaming and tapping screws.
- Sized cylinders for interior doors to 5'0" and exterior doors to 4'0". Non-sized cylinder (4011) adjustable for interior doors to 4'6" and exterior doors to 3'6".
- Closer mounts hinge side, specify right or left swinging door
- Corner brackets available.
- 4011 cylinder meets ADA requirements.
- The 4010 Series is UL and cUL listed with regular or fusible link arms for self-closing doors.
- Tested and certified under ANSI Standard A156.4, grade one.

4110 Series Special Order

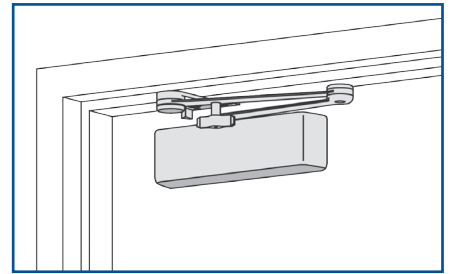

Features

- Standard 4110 series closer is shipped with EXTRA DUTY arm, standard plastic cover, 4110-201 FIFTH SCREW SPACER and self reaming and tapping screws.
- Sized cylinders adjustable for interior doors to 5'0" and exterior doors to 4'0".
- Non-sized cylinder adjustable for interior doors to 4'6" and exterior doors to 3'6".
- Closer mounts parallel arm, specify right or left swinging door.
- 4111 cylinder meets ADA requirements.
- Standard or optional custom powder coat finish.
- Optional plated finish on metal cover, arm and fasteners.
- Optional SRI primer for installations in corrosive conditions is available with powder coat only.
- The 4110 Series is UL and cUL listed for self-closing doors without hold-open.
- Tested and certified under ANSI Standard A156.4, grade one.


Stocked Product

1461
4011

Finish: Aluminum Only
Finish: Aluminum Only

Non-Handed
Hand: Specify Right Hand (RH) or Left Hand (LH)

LCN 4040 XP Series

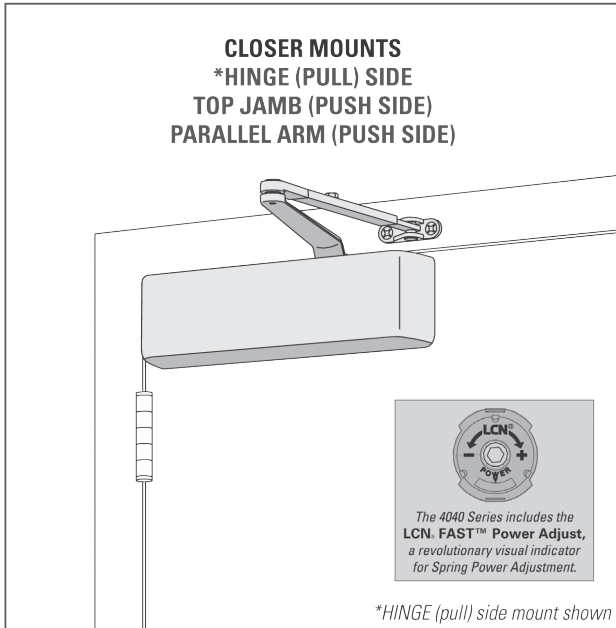

New 4040XP

The new 4040XP is LCN's most durable heavy duty closer designed for the most demanding, high use and abuse applications.

- 44% increased bearing load capacity
- Strongest pinion ever- at 3/4" journal diameter
- Widest bearing ever- at 5/8"
- Stronger pinion teeth
- New V-shield™ seal with 20% longer life
- XP = eXtra Protection in real world applications
- Cast Iron
- Forged Steel Arm
- Double Heat Treated Steel Pinion
- All Weather Fluid
- Non-Handed
- LCN® Fast™ Power Adjust
- Fast & Accurate Installation
- UL & cUL Listed
- Tested and certified under ANSI Standard A156.4, grade one

- NEW 4040XP closer shipped with EDA arm, standard plastic cover, and self reaming and tapping screws.
- Non-sized cylinder is adjustable for interior doors to 5'0" and exterior doors to 4'0".
- Closer mounts parallel arm (EDA arm) on either right or left swinging doors.
- Optional hinge side and top jamb mount with optional regular arm.
- Closers to meet ADA requirements.
- Standard or optional custom powder coat finish.
- Optional plated finish on metal cover, arm and fasteners.
- Optional SRI primer for installations in corrosive conditions is available with powder coat only.
- Optional designer series metal cover
- UL and cUL listed for self-closing doors without hold-open.
- 4040XP can be used with all 4041 accessories.

Stocked Product

4041 Finish: Aluminum, Dark Bronze

4041 CUSH, 4041 DEL, 4041 EDA, 4041 H, 4041 H CUSH, 4041 S CUSH, 4041 SH CUSH
Finish: Aluminum

Regular Arm

MOUNTING					FINISH		COVER	CYLINDER				**ARM FUNCTION										
HINGE (PULL) SIDE	TOP JAMB (PULL)	TOP JAMB (PUSH)	PARALLEL ARM	STOP FACE	POWDER COAT	PLATED	PLASTIC	METAL	DESIGNER METAL	NON-HANDED	NON-SIZED	ACCESSIBILITY	DELAYED ACTION	AVB***	XP	REGULAR (DOUBLE)	STANDARD (SINGLE)	HOLD-OPEN	FUSIBLE LINK	EDA/MEDA	CUSH/H/CUSH	SCUSH/SH/CUSH
●	○	●	○	○	●	●	●	●	●	●	○	○	○	○	○	120°	○	120°	○	180°	110°	110°

● Available
○ Not available

♿ Closer available with less than 5.0 lbs. opening force on 36" door.
**Maximum opening/hold-open point with standard template.
*** Advanced Variable Backcheck


LCN 4040 SERIES • Options

Arms (Stocked in Aluminum Only)


4041 H: Optional non handed arm mounts pull side or top jamb with shallow reveal, hold open adjustable shoe.

4041 EDA: Non handed parallel arm features forged solid steel main and forearm for potentially abusive installations

ADAFG: Force Gauge

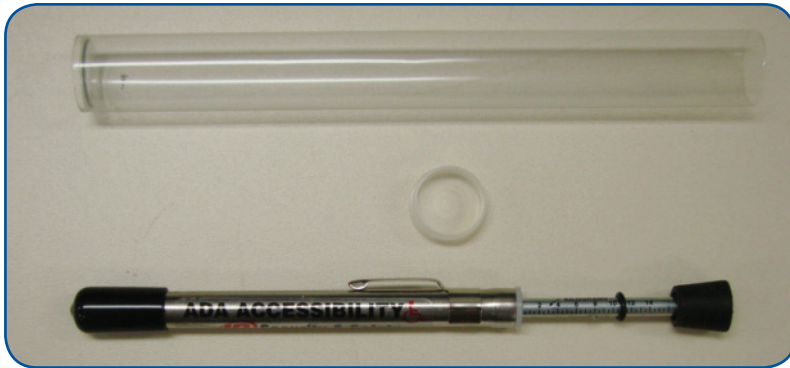

LCN 9540 Series

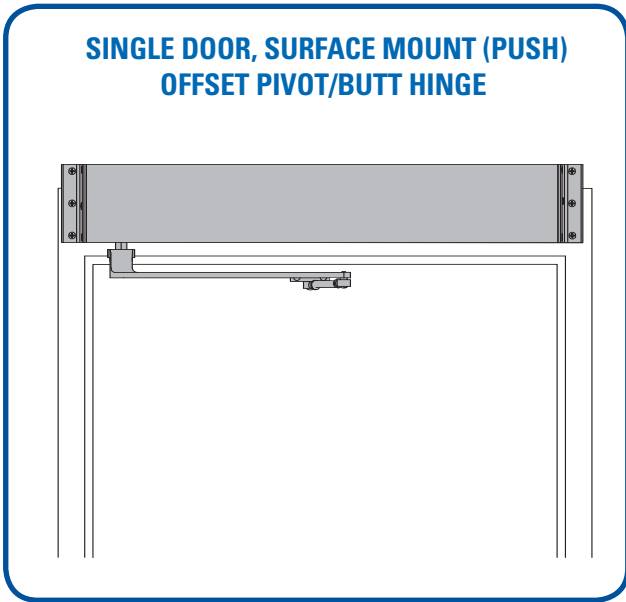

The 9540 SENIOR SWING by LCN is an ADA door operator that is a two-in-one swing door operator. SENIOR SWING operators when activated, opens doors automatically for wheelchair access, yet allows for manual operation for regular pedestrian traffic.

- Push 'N Go permits non-switch activation
- Power Boost provides additional latching force
- Electromechanical unit with microprocessor control
- Digital keypad for easy setup
- Tested internally to over 10,000,000 cycles
- Meets International Building Code requirements and ANSI A156.19
- UL approved for fire doors

9540 Series is fully compliant with UL 325 & UL 1998 and meets the provisions of ANSI A156.19. The 9540 Series is UL listed for fire-rated applications. The 9540 Series also meets the provisions of the Americans with Disabilities Act.

- 9540 series operator is shipped with motor gearbox, control box, regular arm, header, and mounting hardware.
- Single door, surface mounted.
- Meets ADA requirements (power mode only).
- Handed product.
- Adjustable hold open period of 1 to 32 seconds in automatic or manual mode.

Stocked Product

9542 48" Header
Anodize Clear Aluminum
Please specify RH or LH

MOUNTING						HANDING			FINISH		COVER			ARM FUNCTION		
SURFACE MOUNT SINGLE DOOR	SURFACE MOUNT SIMULTANEOUS PAIR	SURFACE MOUNT INDEPENDENT PAIR	CONCEALED SINGLE DOOR	CONCEALED SIMULTANEOUS PAIR	CONCEALED INDEPENDENT PAIR	HANDED	NON-HANDED	STANDARD ANODIZED	CUSTOM ANODIZED	CUSTOM PAINT	METAL	STANDARD (SINGLE)	REGULAR (DOUBLE)	DOUBLE EGRESS (PUSH/PULL)	OFFSET PIVOT ARM	CENTER PIVOT ARM
●	○	○	○	○	○	●	○	●	●	●	●	○	●	○	○	○

- AVAILABLE
- NOT AVAILABLE